


C-shape profiles have a polyurethan foam core which is covered with a conductive copper-nickel (CuNi) coated fabric. The gaskets are fitted with a non-conductive adhesive tape as standard.

The material can be cut to the required length or modified to individual needs. Customized dimensions can be supplied at low cost. From a size of 11x11 mm no PET insert is possible.

Fabric over foam gaskets are also available in a halogen free version.

- Excellent shielding effectiveness
- Polyurethan foam core; standard hardness: 45 kg/m³
- Optionally available with adhesive tape with removal aid (WRL)
- Optionally available with multiple parts on carrier sheet (STP)
- Other dimensions on request
- Also available in a halogen free version

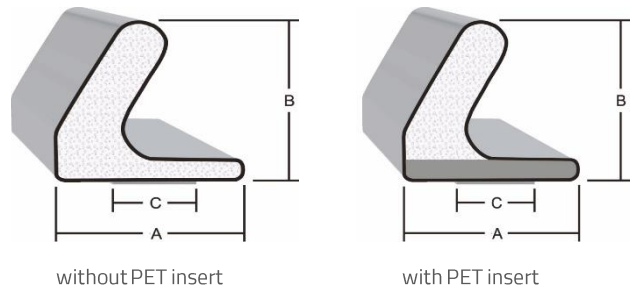

PRODUCT SPECIFICATIONS

PROPERTY	VALUE / TOLERANCE	TEST METHOD
Basic material	Polyurethan foam core	-
Fabric	Conductive fabric (CuNi coated)	-
Width (A)	6,0 – 14,7 mm	-
Thickness (B)	3,5 – 17,9 mm	-
Standard length (L)	2.000 mm	-
Hardness value of foam	32, 45, 70, 150 kg/m ³	-
Surface resistance	<0,03 Ω/□	-
Shielding effectiveness	80 – 90 dB @ 100 MHz - 18 GHz	ASTM D-4935-89
Adhesive tape	Non-conductive, conductive	-
Width of adhesive tape (C)	Non-conductive: approx. 40% of gasket width recommended Conductive: approx. 80% of gasket width recommended	-
Flammability rating	V-0	UL 94
Temperature range	-25 – 80 °C	-
Storage temperature	20 °C	-
Storage humidity	App. 50% rH; non-condensing	-
Shelf life	1 year	-
Guarantee	6 months	-

BUILDING AN ITEM NUMBER

DCW-WxT XX-YY VO-L-ZZZZ

C-Shape Profile

xx	Width (mm)
----	------------

xx	Thickness (mm)
----	----------------

NI	Fabric, CuNI coated
NIHF	Fabric, CuNI coated, halogen free

Nxx	Non-conductive adhesive (mm)
-----	------------------------------

NSxx	Non-conductive adhesive (mm) halogenfree
------	------------------------------------------

Cxx	Conductive aluminium adhesive (mm)
-----	------------------------------------

CTxx	Conductive textile adhesive (mm)
------	----------------------------------

XX	No adhesive tape
----	------------------

Flammability rating

xxxx	Length (mm)
------	-------------

Rxx	On roll (m)
-----	-------------


STPxxx	Sheet Type Package (mm)
--------	-------------------------

WRLxxx	Wide Release Liner (mm)
--------	-------------------------

PU32	PU foam 32 kg/m ³
------	------------------------------

PU70	PU foam 70 kg/m ³
------	------------------------------

PU150	PU foam 150 kg/m ³
-------	-------------------------------



Standard options

EXAMPLE

DCW-6x3,5NI-C2,5V0-50-PU150


C-shape profile; width: 6,0 mm; thickness: 3,5 mm; fabric, nickel coated; conductive adhesive: 2,5 mm; UL 94 V-0; length: 50 mm; PU foam 150 kg/m³

TOLERANCES

WIDTH AND HEIGHT (mm)	TOLERANCE (mm)
0,5 – 6,3	± 0,5
6,4 – 10,0	± 0,7
10,1 – 16,0	± 0,8
16,1 – 25,0	± 1,0
25,1 – 40,0	± 1,3
40,1 – 63,0	± 1,6


LENGTH (mm)	TOLERANCE (mm)
5 – 150	± 0,8
151 – 300	± 1,3
301 – 1.200	± 2,5
1.201 – 1.750	± 4,7
1.751 – 2.300	± 6,4

SHIELDING EFFECTIVENESS

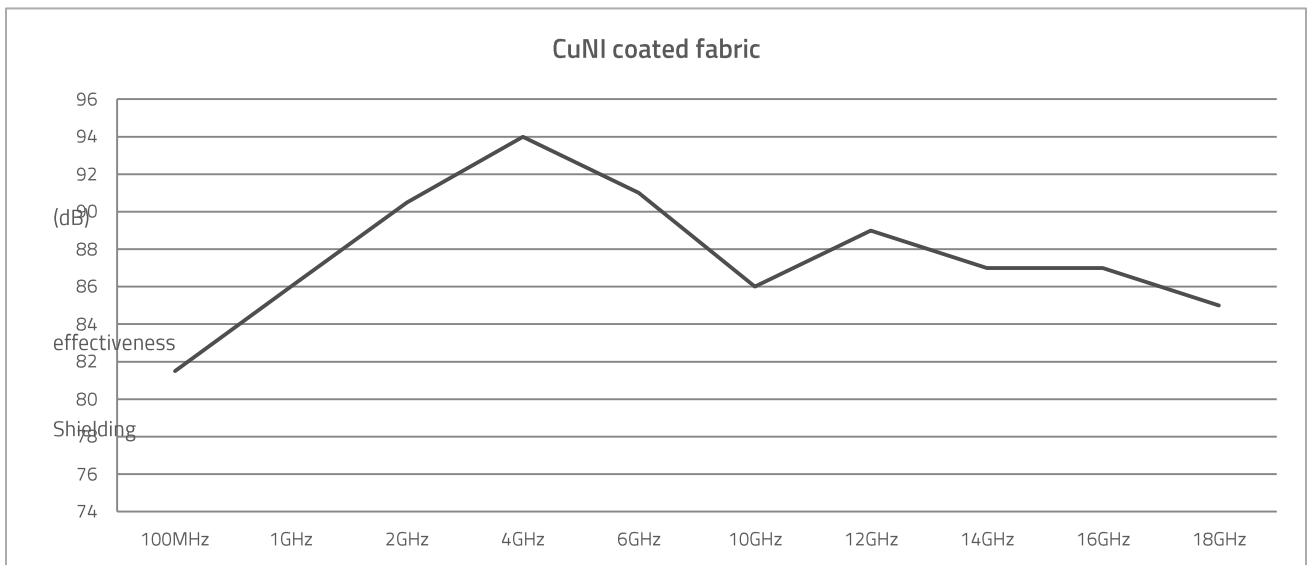

NOTE | Due to less adhesive power of the conductive adhesive – compared to the non-conductive adhesive – the conductive adhesive is only an assembling aid.

FORCE DEFLECTION DIAGRAM CuNi

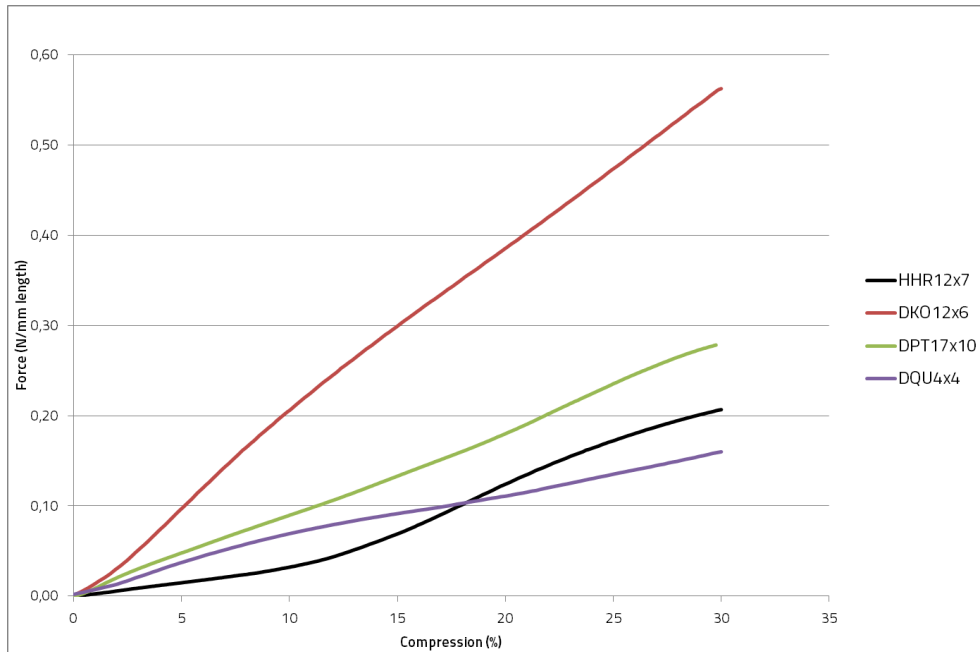

NOTE | Deviations may occur due to the very soft material.