


SMD contact springs are ideal for automatic assembly on printed circuit boards. They are soldered by the standard-reflow-soldering process.

The standard basic material used for SMD contact springs is copper beryllium (CuBe). However, other materials can also be supplied.

As standard, SMD springs are gold-plated (AU). They can be supplied in a wide range of dimensions and shapes.

- Ideal for automatic assembly
- Standard basic material: CuBe
- Standard plating: AU
- Available in different dimensions and types
- Almost unlimited working life




PRODUCT SPECIFICATIONS


PROPERTY		VALUE / TOLERANCE
Thickness		0,1 mm
Width		2,0 mm ± 0,2
Length		4,5 mm ± 0,2
Height		7,0 mm ± 0,2
Basic material		Copper beryllium (CuBe)
Plating	Barrier layer NI Outer layer AU	1µm – 2µm 0,025µm – 0,075µm




DIMENSIONS (mm)

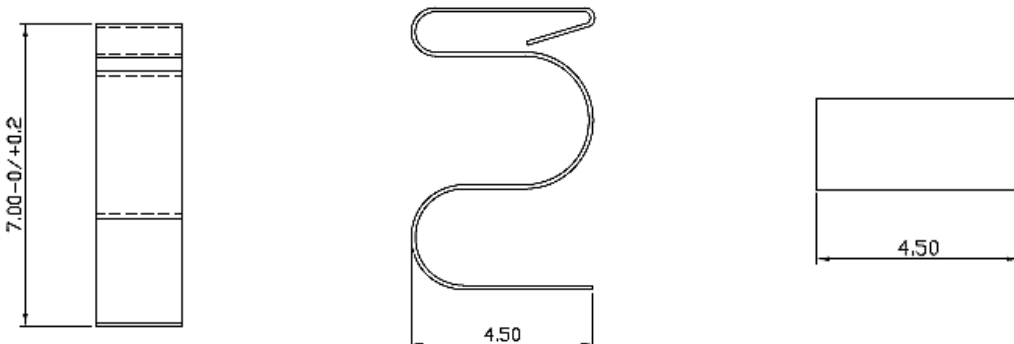

RECOMMENDED RESERVED AREA ON THE PCB (mm)

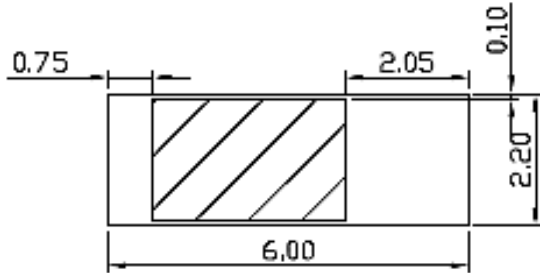

RECOMMENDED PAD FOR THE PCB (mm)

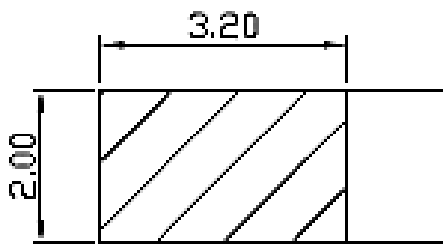


DISCLAIMER

This is only a recommendation based on information available to mtc at the time of printing. Actual land pattern can be significantly different due to various materials and processes used in PCB assembly. mtc makes no representation or warranty of performance based on the recommended land pattern.


BUILDING AN ITEM NUMBER

FCB-173X2045070B-YY-SMD

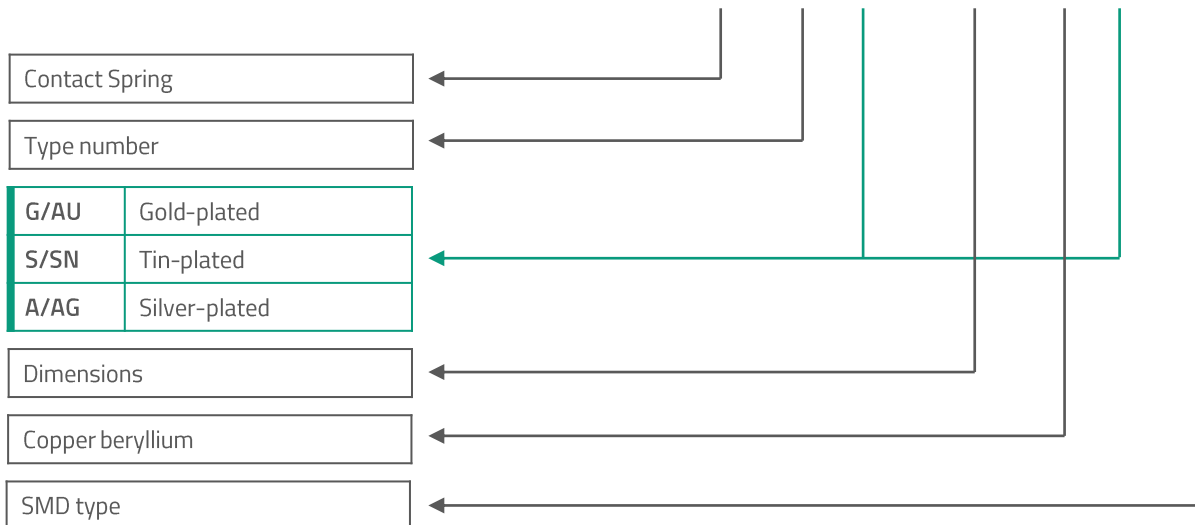

Standard options

FORCE DEFLECTION DIAGRAM*

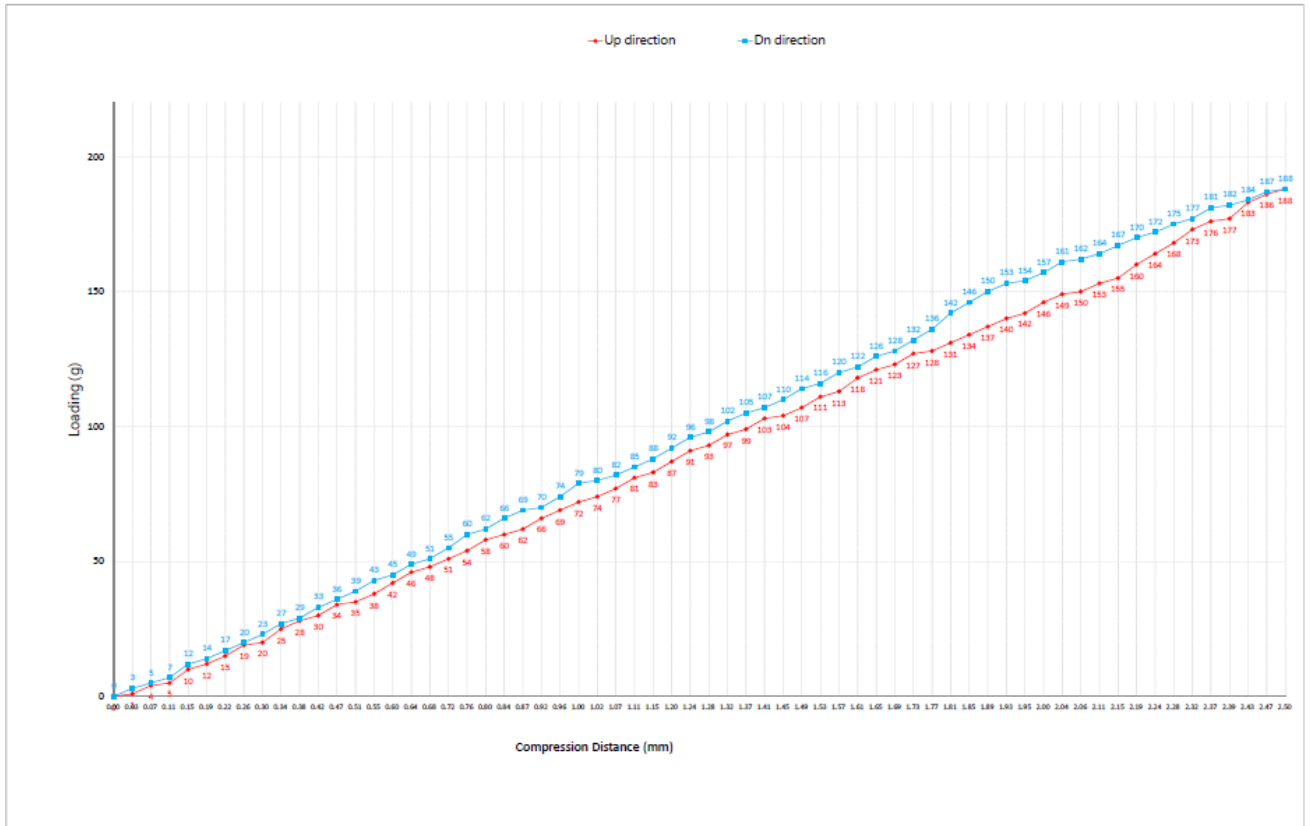


Total Compression Distance (mm)	2.00	
Displacement (mm)	Loading force (g) Down direction	Loading force (g) UP direction
0.00	0	0
0.03	3	1
0.07	5	4
0.11	7	5
0.15	10	10
0.19	14	12
0.22	17	15
0.26	20	19
0.30	23	20
0.34	27	25
0.38	29	28
0.42	33	30
0.47	34	34
0.51	39	35
0.55	43	38
0.60	45	42
0.64	49	44
0.68	51	48
0.72	55	51
0.76	60	54
0.80	62	58
0.84	64	60
0.87	69	62
0.92	70	66
0.94	74	69
1.00	79	72
1.02	80	74
1.07	82	77
1.11	85	81

Total Compression Distance (mm)	2.00	
Displacement (mm)	Loading force (g) Down direction	Loading force (g) UP direction
1.15	88	83
1.20	92	87
1.24	96	91
1.28	98	93
1.32	102	97
1.37	105	99
1.41	107	103
1.45	110	104
1.49	114	107
1.53	116	111
1.57	120	113
1.61	122	118
1.65	126	121
1.69	128	123
1.73	132	127
1.77	136	128
1.81	142	131
1.85	146	134
1.89	150	137
1.93	153	140
1.95	154	142
2.00	157	146
2.04	161	149
2.06	162	150
2.11	164	153
2.15	167	155
2.19	170	160
2.24	172	164
2.28	175	168
2.32	177	173
2.37	181	176
2.39	182	177
2.43	184	183
2.47	187	186
2.50	188	188

NOTE | * Only valid for gold-plated version

PACKING SPECIFICATION – TAPE AND REEL (mm)

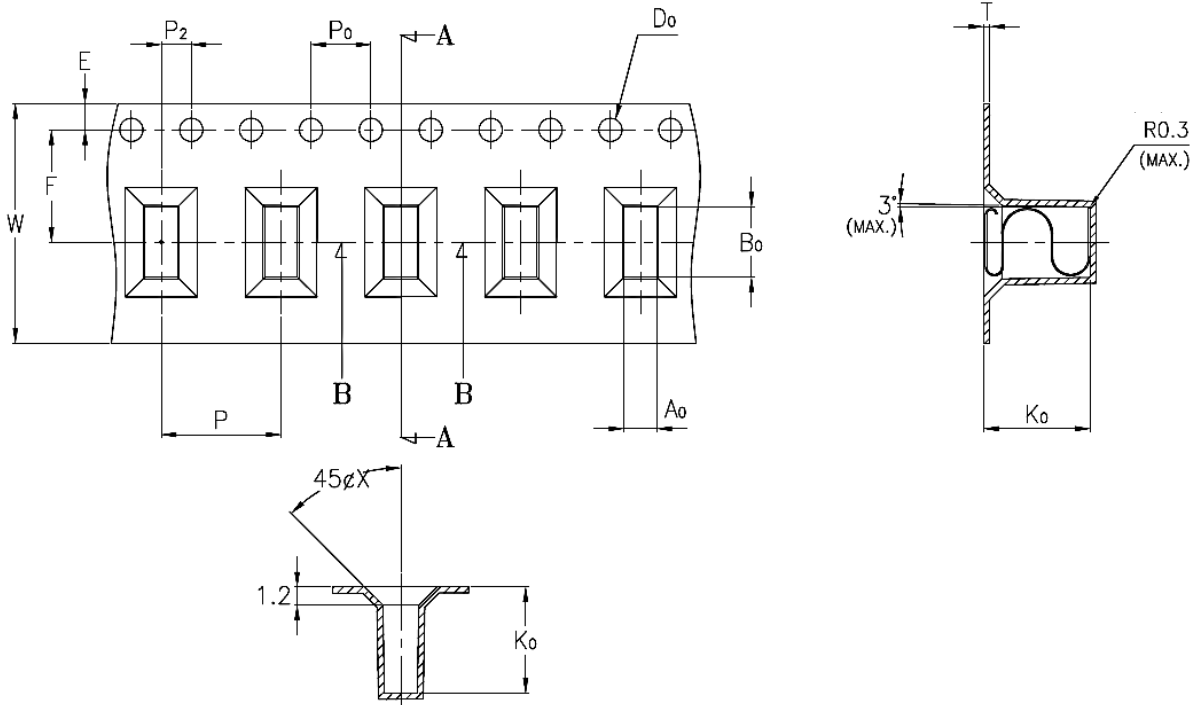

	W	A ₀	B ₀	K ₀	P	F	E	D	P ₀	P ₂	T
	16,00	2,20	4,70	7,10	8,00	7,50	1,75	∅ 1,50	4,00	2,00	0,40
Tolerance	± 0,30	± 0,10	± 0,10	± 0,10	± 0,10	± 0,10	± 0,10	+ 0,10 - 0,00	± 0,10	± 0,10	± 0,05

- 10 sprocket hole pitch cumulative tolerance ± 0,20 mm.
- Carrier camber not to exceed 1 mm in 250 mm.
- A₀ and B₀ measured on a plane 0,3 mm above the bottom of the pocket.
- K₀ measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- All dimensions meet EIA-481-B requirements.
- Material: Clear Polystyrene.
- Component load per 13" reel: 1.000 pcs. (CG-134:4" core).

Modifications and errors excepted. The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verifications and testings to determine the suitability for their own particular purpose of any information or products referred to herein.