


Oriented monel or aluminium metal wires in silicone are a good solution for achieving environmental sealing as well as EMC shielding in a single gasket.

Solid silicone rubber is suitable for applications which require higher compression forces, e.g. as access panels, connector gaskets etc.

A solid fluorosilicone version is available for use in environments where fuels, oils, hydraulic fluids and other contaminants are present.

- Solid silicone as standard; solid fluorosilicone version on request
- Wide variety of options (die-cut gaskets / sheet material up to 225mm wide by 900mm long / strip material in continuous lengths)
- Available with self-adhesive backing; this is not recommended for fluorosilicone version
- Excellent shielding performance due to a wire density up to 140 wires / cm²




PRODUCT SPECIFICATIONS

PROPERTY		VALUE / TOLERANCE	TEST METHOD
Basic rubber material		Solid silicone Solid fluorosilicone	ZZ-R-765 2b MIL-R-25988 G 50
Available metal wires		Monel Aluminium	BS 3075 NA13 – QQ-N-281-B BS EN 537 PT3 – Alloy 5056
Available sheet widths	Solid silicone Solid fluorosilicone	2,4 – 225 mm 2,4 – 150 mm	-
Available thicknesses		0,8 – 9,56 mm	-
Maximum sheet length		900 mm	-
Wire density		140 wires/cm ²	-
Temperature range	Solid silicone Solid fluorosilicone	-60 – 200 °C -55 – 200 °C	-
Recommended compression		15 – 20 %	-
Tensile strength	Solid silicone	2,5 MPa	ASTM D412
Elongation	Solid silicone	250 %	ASTM D412

BUILDING AN ITEM NUMBER

OWS-LxWxT-XX-YYYY

Oriented Wires in Silicone	
xx	Length (mm)
xx	Width (mm)
xx	Thickness (mm)
MO	Monel wires
AL	Aluminium wires
SSL	Silicone solid
FSSL	Fluorosilicone solid

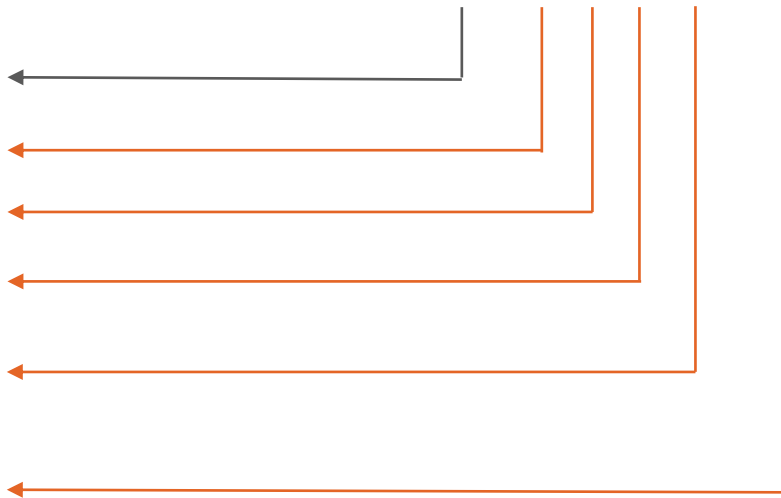

Standard options

EXAMPLE

OWS-100x100x0,8-MO-FSSL

Oriented wires in silicone; length: 100 mm; width: 100 mm; thickness: 0,8 mm; monel wires; solid fluorosilicone

REQUIRED CLOSING FORCE (N/cm²)

COMPRESSION	10 %	15 %	20 %	25 %
T = 0,8 mm	45	60	90	120
T = 1,6 mm	60	85	120	160
T = 2,4 mm	80	120	140	170
T = 3,2 mm	90	120	140	170

TOLERANCES

- Linear: ± 0,8 mm
- Hole Centers: ± 0,4 mm
- Thickness: ± 0,13 mm

SHIELDING EFFECTIVENESS (dB)

	20MHz	60MHz	100MHz	400MHz	800MHz	1GHz	2GHz	4GHz	6GHz	10GHz
MO-SSL	94	100	111	112	116	111	106	98	91	84
MO-FSSL	94	100	111	112	116	111	106	98	91	84
AL-SSL	95	97	105	107	110	111	112	97	90	89
AL-FSSL	95	97	105	107	110	111	112	97	90	89

Modifications and errors excepted. The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verifications and testings to determine the suitability for their own particular purpose of any information or products referred to herein.