

Oriented monel or aluminium metal wires in silicone are a good solution for achieving environmental sealing as well as EMC shielding in a single gasket.

Silicone sponge rubber is suitable for applications which require lower compression forces, e.g. as access panels, connector gaskets etc.

- Silicone sponge as standard; fluorosilicone sponge version is not available
- Wide variety of options (die-cut gaskets / sheet material up to 114mm wide by 900mm long / strip material in continuous lengths)
- Available with self-adhesive backing
- Excellent shielding performance due to a wire density up to 100 wires / cm²




PRODUCT SPECIFICATIONS

PROPERTY	VALUE / TOLERANCE	TEST METHOD
Basic rubber material	Silicone sponge	AMS 3195
Available metal wires	Monel Aluminium	BS 3075 NA13 – QQ-N-281-B BS EN 537 PT3 – Alloy 5056
Available sheet widths	2,4 – 114 mm	-
Available thicknesses	1,6 – 9,56mm	-
Maximum sheet length	900 mm	-
Wire density	100 wires/cm ²	-
Temperature range	-60 – 200 °C	-
Recommended compression	15 – 25 %	-

BUILDING AN ITEM NUMBER

OWS-LxWxT-XX-YYYY

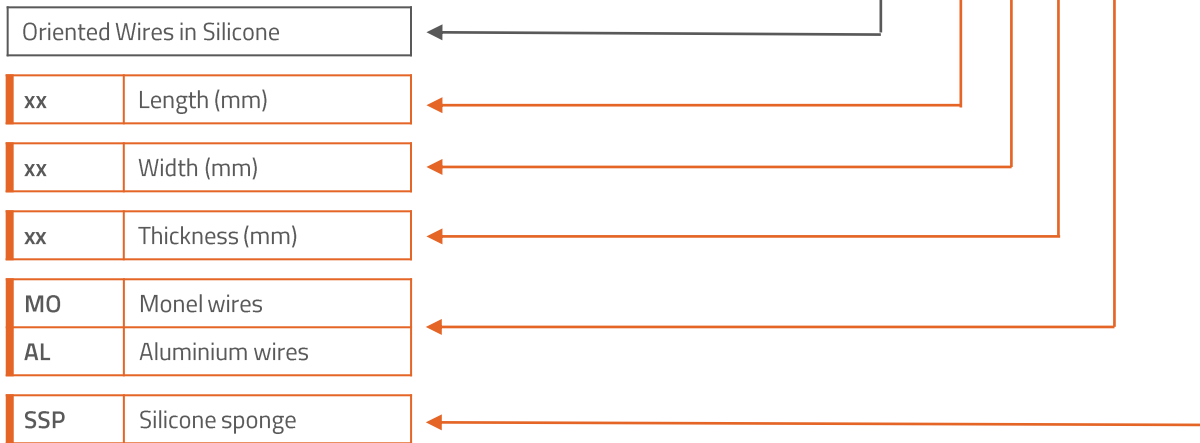

Standard options

EXAMPLE | **OWS-100x100x0,8-MO-SSP**
 Oriented wires in silicone; length: 100 mm; width: 100 mm; thickness: 0,8 mm; monel wires; silicone sponge

REQUIRED CLOSING FORCE (N/cm²)

COMPRESSION	10 %	15 %	20 %	25 %
T = 1,6 mm	50	50	55	60
T = 2,4 mm	50	50	50	50
T = 3,2 mm	40	40	40	45

TOLERANCES

- Linear: ± 0,8 mm
- Hole Centers: ± 0,4 mm
- Thickness: ± 0,13 mm

SHIELDING EFFECTIVENESS (dB)

	20MHz	60MHz	100MHz	400MHz	800MHz	1GHz	2GHz	4GHz	6GHz	10GHz
MO-SSP	94	99	109	105	109	107	112	95	89	84
AL-SSP	94	100	111	110	116	111	112	101	90	88

Modifications and errors excepted. The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verifications and testings to determine the suitability for their own particular purpose of any information or products referred to herein.