


Thermally conductive gap fillers offer, besides excellent thermal properties, the ability to even out small, medium and big gaps and tolerances between the component (hot spot) and the cooling device.

Gap fillers are based on silicone and are filled with ceramic particles. They are tacky by nature. This can be single- or double sided. The use of an adhesive tape is not necessary in most cases. Anyway a single- or double-sided adhesive is available on request.

- Thermal conductivity: 9,0 W/m*K
- Available in 400x300 mm standard sheet size, other dimensions and die-cut parts on request
- Available in thicknesses from 0,5 to 10,0 mm
- Naturally both side tacky as standard, other options available
- Adhesive tape on request
- Based on silicone filled with ceramic particles



PRODUCT SPECIFICATIONS

PROPERTY	VALUE / TOLERANCE	TEST METHOD
THERMAL		
Thermal conductivity	9,0 W/m*K	ASTM D5470
ELECTRICAL		
Breakdown voltage	>6 kV/mm	ASTM D149
Volume resistivity	0,8*10 ¹³ Ω cm	ASTM D257
PHYSICAL		
Composition	Silicone elastomer	-
Hardness	40 - 80 Shore 00	ASTM D2240
Gravity	3,5 g/cm ³	ASTM D792
Thickness range	0,5 - 10,0 mm	-
Standard sheet size	400x300mm	Caliper
Working temperature	-40 - 200 °C	-
Flammability rating	V-0	UL 94 E360243
Tensile strength	32Psi	ASTM D412
Dielectric constant	12,6 MHz	ASTM D150
Total mass loss (TML)	< 0,5% @ 24 h / 125°C vakuum	ASTM E595- 15

BUILDING AN ITEM NUMBER

TCGF-9,0 Sxx #-LxWxT-XXX-YYY-ZZ

Thermally Conductive Gap Filler

Thermal conductivity

xx	Hardness (Shore 00)
----	---------------------

F	Fiberglass reinforced
X	Not reinforced

xxx	Length (mm)
-----	-------------


xxx	Width (mm)
-----	------------

xxx	Thickness (mm)
-----	----------------

BNT	Both sides non-tacky
SST	One side tacky, one side non-tacky
BST	Both sides tacky
SAN	One side adhesive, one side non-tacky
SAT	One side adhesive, one side tacky
BSA	Both sides adhesive

DST	Die-cut parts
KCT	Kiss-cut parts

E1	ESD foil (single side)
E2	ESD foil (both sides)

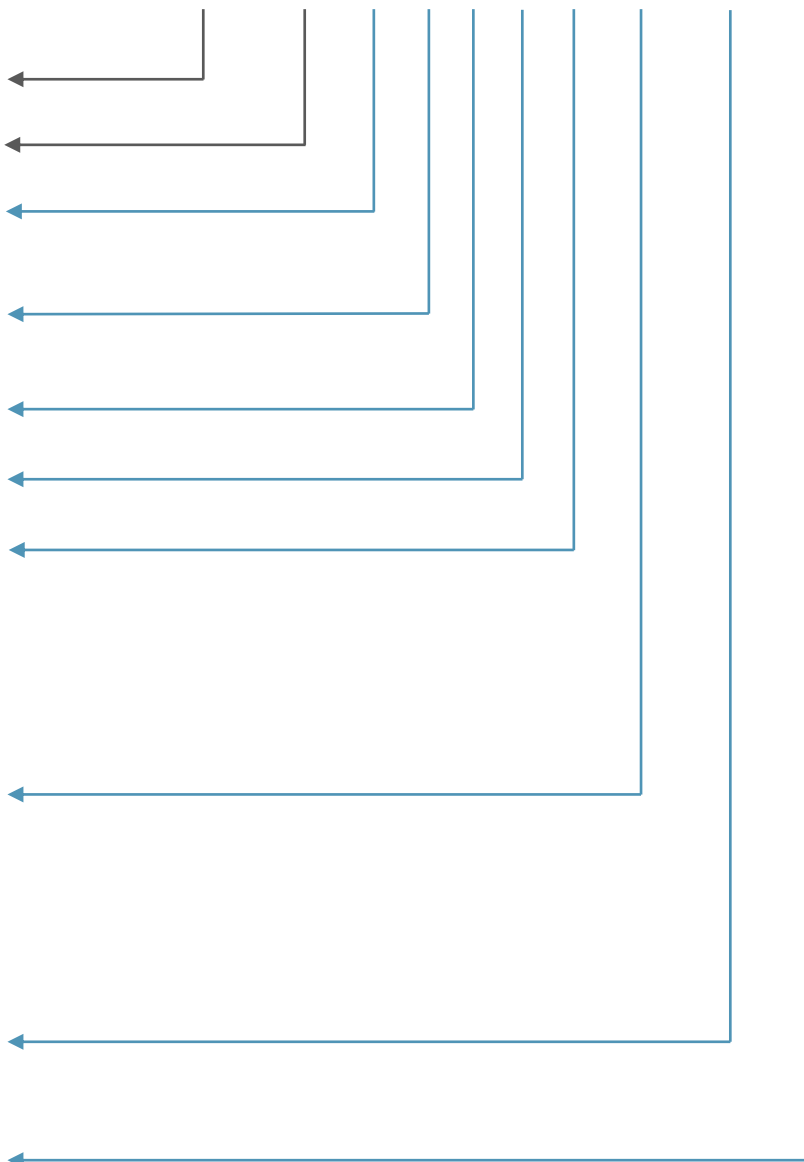


Standard options

EXAMPLE


TCGF-9,0S60F-35x17x6-BST-DST-E1

Thermally conductive gap filler; thermal conductivity: 9,0 W/m*K; hardness: 60 Shore 00; fiberglass reinforced; size: 35x17 mm; thickness: 6 mm; both sides tacky; die-cut; ESD foil (single side)

THERMAL IMPEDANCE VS. PRESSURE

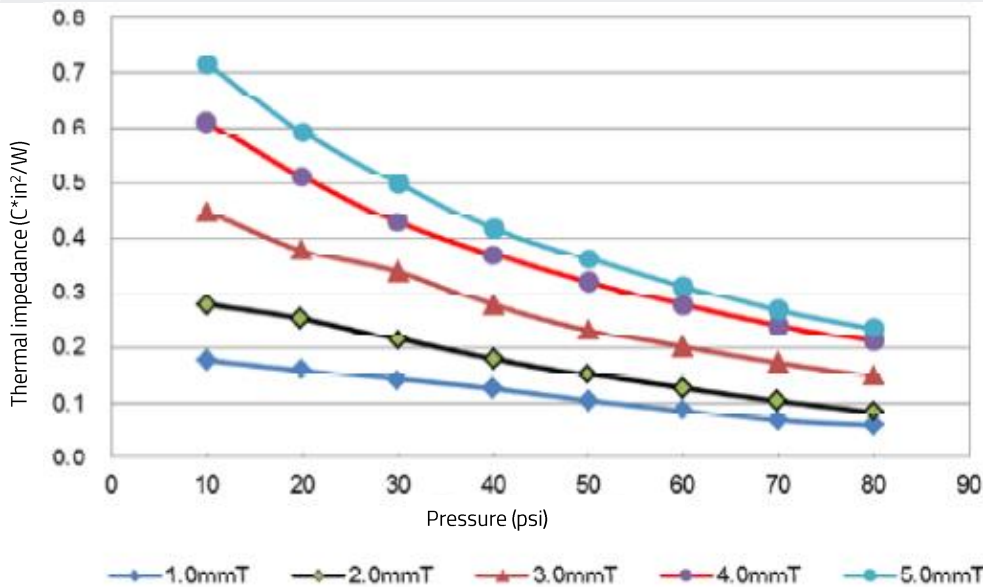

DEFLECTION

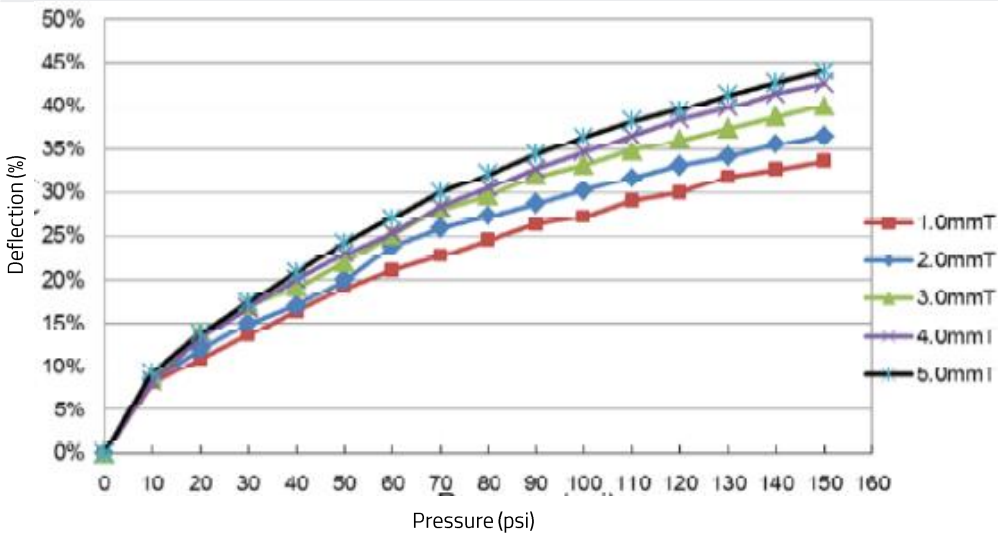

TOLERANCES

THICKNESS		WIDTH AND HEIGHT	
0 – 0,50 mm	+/- 0,05 mm	0 – 50 mm	+/- 0,5 mm
0,60 – 15 mm	+/- 10%	> 50 mm	+/- 1,0 mm

Modifications and errors excepted. The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verifications and testings to determine the suitability for their own particular purpose of any information or products referred to herein.