

Tuned Frequency Absorber product series is a thin magnetically loaded sheet stock. It is also known as resonant frequency absorber and provides great reflection loss at a discrete frequency, typically offering 20dB of attenuation.

Tuned Frequency Absorber offer a narrowband of absorption, typically +/- 10% of the resonant frequency.

The material can be tuned to any frequency from 1 to 40 GHz by simply changing the formulation and thickness.

- Available in 610x610 / 305x305 mm standard sheet size; other dimensions, die-cut and kiss-cut on request
- Available in thicknesses from 0,89 to 3,43 mm
- Very thin for compact locations
- Flexible elastomeric material will not crack
- Narrow frequency range
- Halogen free



RoHS



REACH



UL 94




PRODUCT SPECIFICATIONS

PROPERTY	VALUE / TOLERANCE	TEST METHOD
Basic material	Silicone	-
Standard sheet sizes (LxW)	610x610 / 305x305 mm	-
Thickness range (T)	0,89 – 3,43 mm	-
Adhesive thickness	0,12 mm	-
Operating temperature	-50 – 190°C	
Hardness	60 – 80 Shore A	-
Colour	Grey	Visual
Flammability rating	V-0	UL94

BUILDING AN ITEM NUMBER

MWA-TFA-LxWxT-X-YYY

Microwave Absorber	
Tuned Frequency Absorber	
xx	Length (mm)
xx	Width (mm)
xx	Thickness (mm)
N	Non-conductive adhesive
O	Without adhesive tape
DST	Die-cut parts
KCT	Kiss-cut parts

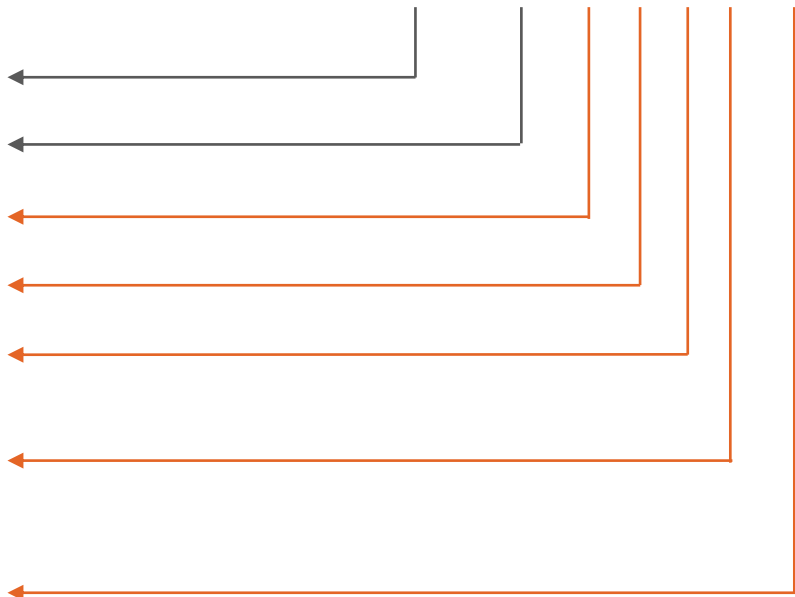

Standard options

EXAMPLE

MWA-TFA-610x610x0,89-N-DST
 Tuned Frequency Absorber; size: 610x610 mm; thickness: 0,89 mm;
 non-conductive adhesive; die-cut

CONFIGURATIONS AVAILABLE


- Standard sheet sizes: 610x610 / 305x305 mm
- Customer-specific sheet sizes on request
- Die-cut parts
- Kiss-cut parts

FREQUENCY RANGE

FREQUENCY (GHz)	MATERIAL THICKNESS (mm)
1,0	3,43
2,0	3,25
2,4	2,79
3,0	2,41
4,0	1,98
5,0	2,06
6,0	1,78
7,0	1,57
8,0	1,35
9,0	1,83
10,0	1,65
11,0	1,52

FREQUENCY (GHz)	MATERIAL THICKNESS (mm)
12,0	1,42
13,0	1,30
14,0	1,19
15,0	1,14
16,0	1,09
17,0	1,04
18,0	1,02
20,6	1,09
24,0	1,07
30,0	0,97
35,0	0,89

REFLECTIVITY PERFORMANCE

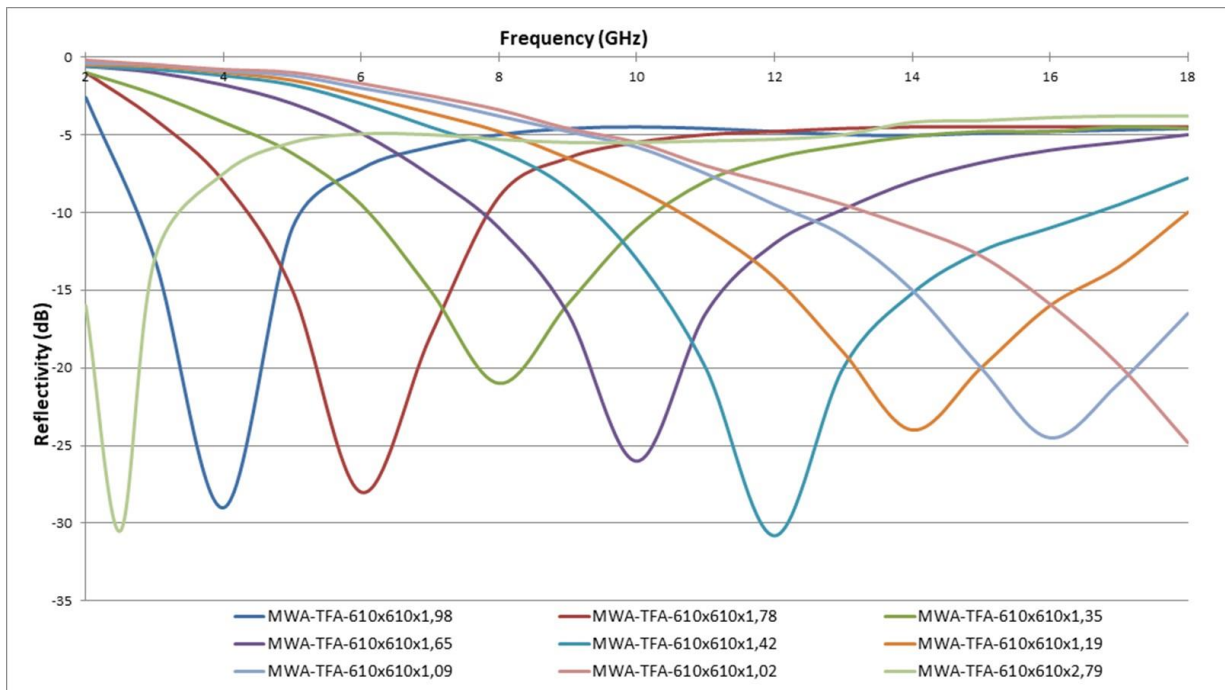

Modifications and errors excepted. The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verifications and testings to determine the suitability for their own particular purpose of any information or products referred to herein.